

LitePad Axiom 90 is a revolutionary LED light from Rosco specifically designed for filmmakers, videographers and still photographers. LitePad Axiom 90 is daylight balanced (5300K) and produces a soft, flattering quality of light that is easy on the eyes and features High CRI (90+) emitters. Its steel and aluminum housing is designed not only to protect the light source, but also offers a variety of quick and easy mounting solutions. The back of the housing has a universal mounting system allowing the LitePad Axiom 90 to be affixed with brackets to light stands or other grip hardware. Without the bracket, the Axiom 90 is lightweight enough to be mounted with Velcro, magnets, rubber bands or zip ties anywhere its soft, attractive light output is needed. The housing also includes a gel slot for adding Rosco color or diffusion filters.

The fixture's slim-profile, low heat, low power consumption and outstanding color rendering make LitePad Axiom 90 an excellent LED soft light choice for image capture professionals everywhere.



## SIZES

### LitePad Axiom 90 Daylight

290 A0306 0120	LitePad Axiom 90 3x6 Daylight
290 A0312 0120	LitePad Axiom 90 3x12 Daylight
290 A0606 0120	LitePad Axiom 90 6x6 Daylight
290 A0612 0120	LitePad Axiom 90 6x12 Daylight
290 A1212 0120	LitePad Axiom 90 12x12 Daylight

## IN THE BOX



- LitePad Axiom 90
- Transformer
- Right Angle Extension Cable
- 1/4 - 20 Axiom Bracket
- 1/4 - 20 Baby Pin

## POWER CONSUMPTION

	Wattage	Amps
3" x 6"	6	0.5
3" x 12"	9.75	0.81
6" x 6"	7.75	0.65
6" x 12"	12	1
12" x 12"	16	1.33

## PROPERTIES

Color Temperature:	5300K
CRI:	93
Lamp Life:	60,000 hrs
Operating Temperature:	-30°C - +85°C
Power:	12V DC Input

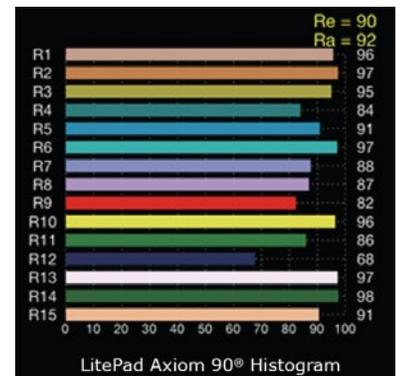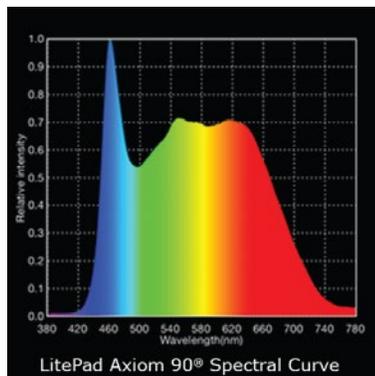

## DIMENSIONS & WEIGHT

	Width	Length	Depth	Weight
3" x 6"	3.37"	6.22"	0.64"	0.80 lbs.
3" x 12"	3.37"	12.22"	0.64"	1.30 lbs.
6" x 6"	6.25"	6.30"	0.64"	1.45 lbs.
6" x 12"	6.37"	12.30"	0.64"	2.25 lbs.
12" x 12"	12.37"	12.30"	0.64"	3.95 lbs.

## LIGHT OUTPUT

	Units	12"	18"	24"	36"	48"
3" x 6"	FC	50	23	13	6	3.5
	LUX	520	240	140	65	37
3" x 12"	FC	70	37	21	10	5.6
	LUX	800	400	230	110	60
6" x 6"	FC	70	34	18	8.5	5
	LUX	740	370	200	90	53
6" x 12"	FC	120	60	34	16	9
	LUX	1300	640	370	170	100
12" x 12"	FC	180	90	52	25	14
	LUX	1900	970	560	260	150